

Sony CCD High Resolution Box Camera



600
TVL



OSD



High
Light
Compensation



Backlight
Compensation



Digital
Noise
Reduction



Day/Night



Auto
Tracking
White Balance



Wide
Dynamic
Range



Auto
Gain
Control



High
Contrast
Image



Auto
Electronic
Shutter




Privacy
Zone



ABX-1650

Model	ABX-1650
Image Sensor	1/3" Sony Super HAD II CCD
Resolution	600 TV Lines
Effective Pixels	NTSC: 768x494 / PAL: 752x582 (H)x(V)
Min. Illumination	0.08 Lux @ F1.2
Lens	CS Mount Lens (not included)
S/N Ratio	Mor than 50dB(AGC OFF)
Electronic Shutter	1/60(1/50)~1/100,000sec
Video Output	1.0Vp-p/75 ohm Composite
Sync. System	Internal
OSD	Built-in OSD Menu
White Balance	ATW/PUSH/Manual
Shutter/AGC	Auto/Manual
Backlight	BLC/HLC
Privacy Zone	ON / OFF (up to 4 zones)
IR LED	N/A
Weatherproof	N/A
Power Source	DC12V +/- 10% @ 200mA
Dimensions	60 (W)x 50 (H)x 130 (L) mm
Weight	280g
Operating Temp.	-10°C to +50°C (-14°F to +122°F)

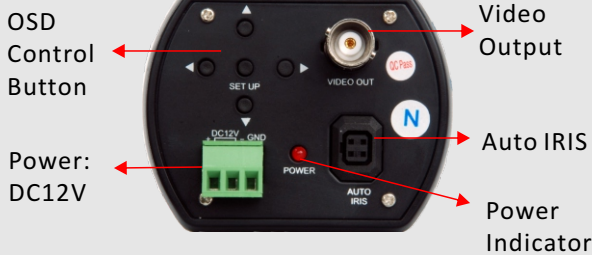

This camera features auto-iris support, backlight compensation.

Top & Bottom Mount

For users convenience, ABX-1650 comes standard with both top and bottom mounting options. Top mounts are most commonly used for indoor applications, requiring the camera hang from the ceiling using a ceiling bracket. Bottom mounts are provided for indoor wall mount applications, or for outdoor applications requiring the camera to be mounted inside of a weatherproof enclosure.



OSD - Easy Operation by One-finger

The simple push-button keypad on the rear panel, allowing users to manage the camera's OSD and fine tune virtually every setting of the camera to achieve the best image quality.

The dimensional keypad features up/down/left/right and enter controls.

