


OSD Infrared Bullet Camera



Model	AIR-493V
Image Sensor	1/3" Sharp Color CCD
Resolution	480 TV Lines
Effective Pixels	NTSC: 510x492 / PAL: 500x582 (H)x(V)
Min. Illumination	0.1 Lux @ F1.8
Lens	2.8-12mm Vari-focal Lens
S/N Ratio	More than 52dB(AGC OFF)
Electronic Shutter	1/60(1/50)~1/100,000sec
Video Output	1.0Vp-p/75 ohm Composite
Sync. System	Internal
OSD	Built-in OSD Menu
White Balance	ATW/AWC(PUSH LOCK)/Manual
Shutter/AGC	Auto/Manual/FLK
Backlight	BLC/HLC
IR LED	66pcs
IR Distance	50M (165')
Weatherproof	IP 65
Power Source	DC12V +/- 10% @500mA w/IR on
Dimensions	118 (W)x 85 (H)x 285 (D) mm
Weight	1100g
Operating Temp.	-10°C to +50°C (-14°F to +122°F)

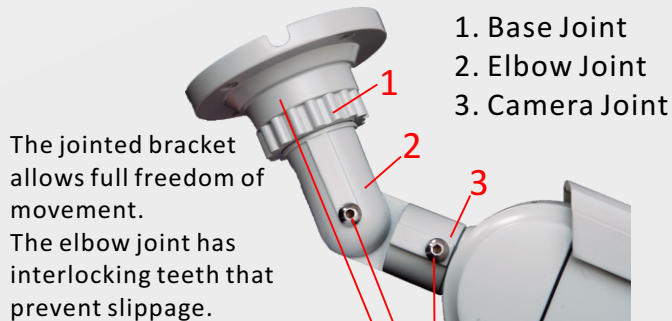

Security screws lock down all adjustment points - at camera, at base, and at elbow pivot.



Easy Camera Setup

The 3-dimensional mini joystick on video/camera cable gives the user quick access to the OSD menu.

SETUP	
LENS	MANUAL
EXPOSURE	ATW1
WHITE BAL	OFF
BACKLIGHT	COLOR
DAY/NIGHT	OFF
DPC	OFF
SPECIAL	
RESET	
EXIT	

OSD Control