

Sony CCD High Resolution IR Bullet Camera


| | | | |
|-------------------------|-----------------------------|-------------------------|-------------------------|
| | | | |
| 600 TVL | OSD | High Light Compensation | Backlight Compensation |
| | | | |
| 50M | IP 65 | Day/Night | Digital Noise Reduction |
| | | | |
| Dead Pixel Compensation | Auto Tracking White Balance | Wide Dynamic Range | Anti-Flicker |



AIR-693V



- A. External adjustment for zoom and focus (4-9mm)
 B. Easy installation for unscrewing the base of the bracket

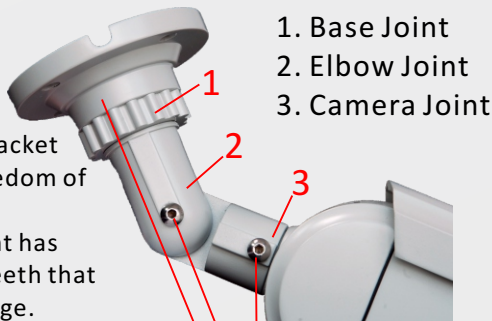

The jointed bracket allows full freedom of movement. The elbow joint has interlocking teeth that prevent slippage.

Security screws lock down all adjustment points - at camera, at base, and at elbow pivot.

1. Base Joint
2. Elbow Joint
3. Camera Joint

Security Screws

Easy Camera Setup

The 3-dimensional mini joystick on video/camera cable gives the user quick access to the OSD menu.



| SETUP | |
|-----------|--------|
| LENS | MANUAL |
| EXPOSURE | ← |
| WHITE BAL | ATW1 |
| BACKLIGHT | OFF |
| DAY/NIGHT | COLOR |
| DPC | OFF |
| SPECIAL | ← |
| RESET | ← |
| EXIT | ← |

OSD Control

| | |
|--------------------|--------------------------------------|
| Model | AIR-693V |
| Image Sensor | 1/3" Sony Super HAD II CCD |
| Resolution | 600 TV Lines |
| Effective Pixels | NTSC: 768x494 / PAL: 752x582 (H)x(V) |
| Min. Illumination | 0.1 Lux @ F1.8 |
| Lens | 2.8-12mm Vari-focal Lens |
| S/N Ratio | More than 52dB(AGC OFF) |
| Electronic Shutter | 1/60(1/50)~1/100,000sec |
| Video Output | 1.0Vp-p/75 ohm Composite |
| Sync. System | Internal |
| OSD | Built-in OSD Menu |
| White Balance | ATW/AWC(PUSH LOCK)/Manual |
| Shutter/AGC | Auto/Manual/FLK |
| Backlight | BLC/HLC |
| IR LED | 66pcs |
| IR Distance | 50M (165') |
| Weatherproof | IP 65 |
| Power Source | DC12V +/- 10% @500mA w/IR on |
| Dimensions | 118 (W)x 85 (H)x 285 (D) mm |
| Weight | 1100g |
| Operating Temp. | -10°C to +50°C (-14°F to +122°F) |