


Sony CCD Ultra High Resolution IR Bullet Camera



AIR-794V



A. External adjustment for zoom and focus (2.8-12mm)
B. Easy installation for unscrewing the base of the bracket

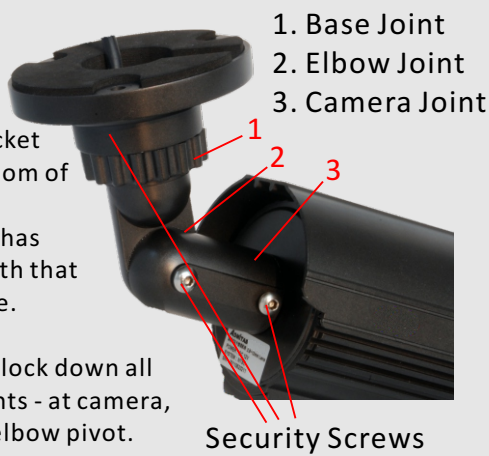

The jointed bracket allows full freedom of movement. The elbow joint has interlocking teeth that prevent slippage.

Security screws lock down all adjustment points - at camera, at base, and at elbow pivot.



Easy Camera Setup

The 3-dimensional mini joystick on video/camera cable gives the user quick access to the OSD menu.

SETUP MENU	
LENS	MANUAL
SHUTTER/AGC	MANUAL
WHITE BAL	ATW
BACKLIGHT	OFF
PICT ADJUST	OFF
ATR	OFF
MOTION DET	ON
NEXT	SAVE ALL
EXIT	

SETUP MENU	
PRIVACY	OFF
DAY/NIGHT	AUTO
NR	OFF
CAMERA ID	ENGLISH
LANGUAGE	
CAMERA RESET	
BACK	SAVE ALL
EXIT	

Model	AIR-794V
Image Sensor	1/3" Sony EXview HAD II CCD
Resolution	700 TV Lines
Effective Pixels	NTSC: 976x494 / PAL: 976x582 (H)x(V)
Min. Illumination	0.03 Lux @ F1.2
Lens	2.8-12mm Vari-focal Lens
S/N Ratio	More than 52dB(AGC OFF)
Electronic Shutter	1/60(1/50)~1/100,000sec
Video Output	1.0Vp-p/75 ohm Composite
Sync. System	Internal
OSD	Built-in OSD Menu
White Balance	ATW/USER/PUSH LOCK/Manual
Shutter/AGC	Auto/Manual
Backlight	BLC/HLC
IR LED	60pcs
IR Distance	45M-50M (150'-166')
Weatherproof	IP 66
Power Source	DC12V +/- 10% @500mA w/IR on
Dimensions	100 (W)x 90 (H)x 310 (D) mm
Weight	650g
Operating Temp.	-10°C to +50°C (-14°F to +122°F)

