


Professional DVR with Most User-friendly Operation

- H.264 Video Compression Format
- Easy DVR Setup/ Friendly GUI/ Easy Backup
- Real Time Recording (240/200fps @ 2CIF)
- Network: IE/CMS/3G Mobile Phone Remote
- Dual Stream Function
- Individual Recording Setup & Function for Each Channel
- Support Pre-Alarm / Water Mark / Bookmark search
- Support Daylight Saving Time / NTP
- HDD S.M.A.R.T function



Specification

Model		PR-2708			
Video Input (NTSC/PAL)		BNC x 8			
Video Compression Format		H.264 / (Network Transmission: H.264)			
Video Output		2x Main (Composite & VGA) / 1x Spot (Composite)			
VGA Output		640 x 480; 800 x 600; 1024 x 768; 1280 x 1024 pixels			
Audio Input/Output		1 CH Input / 1 CH Output			
Sensor In/Alarm Out		4 / 1			
Display	Speed	240fps / 200fps			
	Resolution(pixels)	720 x 480 (NTSC) / 720 x 576 (PAL)			
	Split Screen	1 / 4 / 9 / PIP			
Recording	Resolution(pixels)	NTSC:352 x240 / 720x240 / 720x480, PAL:352 x288 / 720x288 / 720x576			
	Mode	Normal, Motion, Alarm, Scheduled, Emergency recording			
	Speed	NTSC	240fps CIF(352 x 240)	240fps 2CIF(720 x 240)	120fps D1(720x480)
		PAL	200fps CIF(352 x 288)	200fps 2CIF(720 x 288)	100fps D1(720x576)
Playback	Display	1/4/9			
	Search	Date, Time, Event (Motion, Alarm), Camera, First event, Last event *Time bar playback via mouse			
	Speed	Normal, REW & FF (1x,2x,4x, 8x,16x, 32x), Frame to Frame, Pause			
	Device	Licensed software application/ IE/ Front panel/ Remote controller/ Mouse			
Hard Disk Drive Storage		3 SATA HDD up to 9TB or 2 SATA HDD + 1 DVD burner / HDD temp & status check, overheat alert			
Backup Device		USB2.0, DVD Writer (optional), Remote Network Backup			
Web Interface		Remote software / IE Browser / 3G Mobile Phone Surveillance Function			
PTZ Control / Port		Support Pelco-D, Pelco-P protocol / RS-485 Port			
Remote Alarm Notification		Email notification and upload to FTP site			
Network Connection		PPPoE, TCP/IP, DHCP, SMTP, DDNS			
LAN		Gigabit Ethernet (RJ45)			
Accessories		IR remote controller / Mouse			
Power		DC12V x 5A			

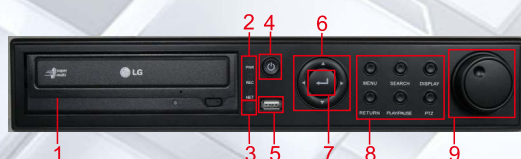

1. DVD Writer (Optional)
2. Indicator (Power, Record, Network)
3. IR Sensor for Remote Controller
4. Power On/Off
5. USB Connector
6. Control Button (Up/Down/Right/Left)
7. Confirm Button (Enter Key)
8. Function Button
9. Shuttle (Fast Forward/Fast Backward)